

SUPERTOOTH LIGHT



Bluetooth Handsfree Kit
For Bluetooth Mobile Phones



Product Description


SUPERTOOTH LIGHT is a Bluetooth handsfree kit that supports headset or handsfree profile phones. Its special features include Full DSP Noise Cancellation/Echo Cancellation. Thus, it provides an advanced audio quality. It is designed for easy handsfree operation and superior performance.

Don't forget: Drive safely and within the law.

Check if the national or local legislation into force in your country does limit the use of mobile phones while driving. It is up to the user of this product to respect the said legislation in the area where he lives.

Product Overview

SUPERTOOTH LIGHT (On Position)

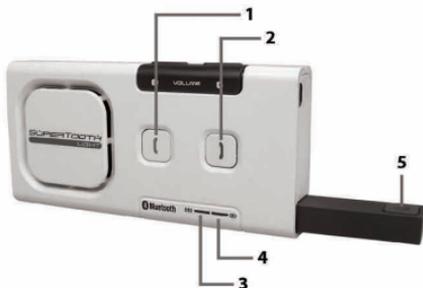

SUPERTOOTH LIGHT (Off Position)



- 1 **Accept Button**
- 2 **End/Reject Button**
- 3 **Bluetooth Indicator**
- 4 **Charge Indicator**
- 5 **Microphone Shaft**
*Press-and-release to Switch On
*Push-in to Switch Off
- 6 **Speaker**
- 7 **Volume Down**
- 8 **Volume Up**
- 9 **Charger Port**
- 10 **Magnets**

SUPERTOOTH LIGHT (Back View)



Charging

When the **Charge Indicator (4)** turns red, the battery of the kit is low. Charge the unit.

1. Connect the charger's plug into the **Charger Port (9)** of the SUPERTOOTH LIGHT. Connect the charger to an external power source.

Charge Indicator (4) Status:

Steady red: Low Batt

Steady orange: Charging

Steady green: Full Charge

2. When fully charged, disconnect the charger.



Power On/Off

Power On: Press-and-release the **Microphone Shaft (5)**.

Power Off: Push the **Microphone Shaft (5)** in.

Pairing to your Bluetooth Mobile Phone

Pair the SUPERTOOTH LIGHT to your Bluetooth mobile phone to create the link or audio connection between the two. This has to be done only at the first connection to a new phone.

1. From OFF, press and hold the **Accept Button (1)**.



2. While holding the **Accept Button (1)**, switch the kit on (Press-and-release the **Microphone Shaft (5)**).



3. When the **Bluetooth Indicator (3)** turns blinking red/blue, release the **Accept Button (1)**. The kit is now in pairing mode.

4. While the kit is in pairing mode, access the Bluetooth menu of your phone. Turn on the Bluetooth function then execute a Bluetooth search, or discover. (See your phone's manual.)
5. When the phone displays the list of Bluetooth devices, select **ST LIGHT**.
6. When the phone asks for the password, enter 0000 and press **Ok**.

Important Note: The kit is paired now. Most phones automatically connect to the kit after pairing. With some phones you need to connect manually after pairing.

Go back to **Bluetooth > Paired devices > highlight ST LIGHT > press Options >** then press **Connect**.

The kit is now ready to use.

Installation

Fix the metal clip of SUPERTOOTH LIGHT on the sun visor.



Attach the magnetic back of SUPERTOOTH LIGHT to the fixed metal clip. The SUPERTOOTH LIGHT must be placed in such way that its microphone is directed to the mouth of the user.



Basic Operations

IMPORTANT:

The kit needs to be 'paired' to your Bluetooth mobile phone first, before you can use the following functions. See **Pairing to your Bluetooth Mobile Phone** on page 4.

Make a Call (Normal Dial):

Dial the number on your phone. Audio will automatically be on the kit.

*Note: With some phones like Siemens S55 and Panasonic X70, audio is always on the phone during an outgoing call. You will need to press the **Accept Button (1)** for 1 second to transfer the audio to your kit.*

Answer a Call:

During the ring tone, press **Accept Button (1)** for 1 second to answer the call.

End a Call:

Press **End/Reject Button (2)** for 1 second to end the call.

Voice Dial:

Important: Be sure the voice dialling function of your phone is activated. Record at least one **voice tag**. (Kindly refer to the procedure in your phone's manual.)

Note: Voice dialling entries must be stored in the phone's memory, not on the SIM card!

1. Press the **Accept Button (1)** for 1 second.
2. A voice dial beep will be heard on the kit to prompt the user to say the voice tag of the contact to call.
3. Say the voice tag exactly as how you recorded it.
4. The voice will be played back to you, and then the phone will dial the number automatically.

Redial (For Handsfree Profile Phones only):

Press **Accept Button (1)** for 3 seconds. The last dialled number will be redialled.

Reject a Call (For Handsfree Profile Phones only):

During the ring tone, press **End/Reject Button (2)**. The incoming call will be rejected.

Volume Setting:

Increase or decrease the volume by pressing the **Volume Up (8)** or **Volume Down (7)** button. Press repeatedly until desired level is reached.

Audio Transfer (For Handsfree Profile Phones only):

During an ongoing call, you can transfer the audio.

Kit to Phone: Push in the **Microphone Shaft (5)** or turn off the kit. The audio will be transferred to the phone.

Phone to Kit: Press-and-release the **Microphone Shaft (5)** or turn on the kit.

*Note: Some phones do not connect automatically to the kit after turning on. With these phones, you need to press **Accept Button (1)** for 1 second to transfer the audio to the kit.*

Advanced Functions

Multi-Pairing / Switching Connections Between Phones:

The SUPERTOOTH LIGHT can be paired to 5 Bluetooth phones. An additional pairing will automatically delete the phone that has not been used for the longest time. Thus, the SUPERTOOTH LIGHT always maintains 5 phones in its memory.

You can easily switch to any of the paired phones by:

1. Disconnecting the currently used phone using the “Active devices” in the Bluetooth menu of that phone.
2. Connecting to the wanted phone by using the “Paired devices” in the Bluetooth menu of that wanted phone.

*Note: Reconnection to a paired phone can also be done by pressing the **Accept Button (1)**. But when you press the **Accept Button (1)**, the SUPERTOOTH LIGHT will attempt to connect to the last used phone only. Therefore, it is recommended to connect to another paired phone using the phone menu.*

SUPERTOOTH LIGHT Specifications

Bluetooth Compliance: . . . Bluetooth version 1.2 specifications

Supported Bluetooth Profiles: Supports headset and handsfree profiles with automatic detection

Operating Range: Up to 10 meters

Frequency: 2.4 GHz

Talk Time: Up to 15 hours

Stand-by time: Up to 800 hours

Charging Time: 3 hours

Battery Type: Rechargeable Lithium Ion

Special Features:

- *Full Duplex
- *Full DSP Noise Cancellation / Echo Cancellation
- *Digital Volume Control
- *Voice Recognition Dialling (If phone supports)
- *Last Call Redial
- *Reject Incoming Call
- *Can also be charged directly from a PC via USB Cable (not included)
- *Compact Size

Installation: Quick fixation on sun visor via magnetic clip

Dimensions (mm): 18.2 x 60.2 x 122

Weight: 115 g